



**Mega Sealers**  
Waterproofing Solutions

# MEGA ANTI MOIST

Multi Colors Moisture Barrier Paint For  
Positive Hydrostatic Protection



## DATA SHEET

### DESCRIPTION

**Mega Anti Moist** is a high quality, premium exterior paint that protects your home from damaging effects of all types of weather. It is powered with Smart Release Technology which gives advanced protection against algae and fungus that is caused by the sun and rain. It has mid-sheen finish with outstanding dirt resistance, flexibility and increased spread rate.



### FEATURES AND BENEFITS


- ✓ The special coaty system gives outstanding water and dirt resistance.
- ✓ Excellent UV protection and moisture control.
- ✓ Rapid Drying - fast recoating time and labour saving.
- ✓ Outstanding exterior durability flexibility and adhesion.
- ✓ Lock porosity of the substrate and create anti-porus surface to prevent moisture penetration.
- ✓ Can be used on EIFS, XPS & EPS system.

## PRODUCT USES

- ◆ Suitable for cement plaster, gypsum plaster, concrete, fibre cement, composite boarding, previously painted surfaces, mild steel & iron, galvanised iron and wooden surfaces provided that the appropriate preparation and priming is carried out.
- ◆ Also suitable for interior bathroom and kitchen ceilings where added mould resistance is required.

## PREPARING THE SURFACES

New or bare surfaces: New or bare surfaces must be clean, dry and free from efflorescent salts. Sand the surface with suitable sand paper or sandstone to make the plaster surface smooth. Dust off thoroughly. For best result apply correct application procedure. Let the surface to dry for 2-3 hrs and then do topcoat application.

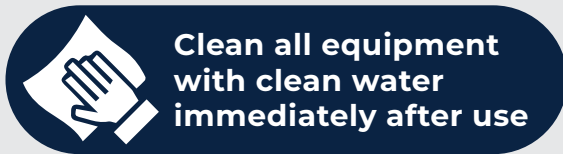

## TECHNICAL INFORMATION

Appearance	Mid-sheen
Colour	White, Beige, Light Green, Light Pink Light Purple, Light Blue, Light orange and as per customization.
Binder	Polyurethane
Density at 23°C	Approx. 1.29
Solids Content	By weight: Approx. 77%
Spreading Rate	Approx. 18m <sup>2</sup> -2m <sup>2</sup> per kg depending on surface porosity, profile and application method.
Recommended DFT per coat	Min. 500 microns Max. 900 microns.
Recommended WFT per coat	Min. 250 microns Max. 500 microns.



**Mega Sealers**  
Waterproofing Solutions

## MEGA ANTI MOIST

**Head Office:** Plot No. C1-C, 2nd Floor, Main Khayaban-e-Itehad, Near KFC, Opposite Dubai Islamic Bank, DHA Phase 7, Karachi.  
**Plant:** Plot B-653, Sector-3, Near Life Care Medical, Ahsanabad, Karachi.

Contact: +92 318 3880163 | +92 213 5318800  
www.megasealers.com | info@megasealers.com

